



CERTIFICATE OF PRODUCT CERTIFICATION

CERTIFICATE NO.: CQC24001453029

Valid from: Jan.06,2025

Valid until:Sep.03,2029

NAME AND REGISTERED ADDRESS OF THE APPLICANT Shanghai Chipanalog Microelectronics Co., Ltd.
Room 401, fourth floor, room 501, fifth floor, building 18, no. 599, Gaojing Road, Xujing town, Qingpu District, Shanghai

NAME AND REGISTERED ADDRESS OF THE MANUFACTURER Shanghai Chipanalog Microelectronics Co., Ltd.
Room 401, fourth floor, room 501, fifth floor, building 18, no. 599, Gaojing Road, Xujing town, Qingpu District, Shanghai

NAME AND LOCATION OF THE FACTORY JCET Semiconductor (Suqian) Co.,Ltd.
5 PuTuoShan Rd,Suzhou Suqian Industrial Park,Suqian

PRODUCT NAME, MODEL AND SPECIFICATION Digital Isolator
See Appendix

THE STANDARDS AND TECHNICAL REQUIREMENTS FOR THE PRODUCTS GB 4943.1-2022

TYPE OF CERTIFICATION SCHEMES type test+follow up factory inspection

This is to certify that the above mentioned product(s) complies with the requirements of certification rules of CQC11-471543-2022.

Date of original issued: Nov.26,2024

The validity of the certificate is subject to positive result of the regular follow up inspection by issuing certification body until the expiry date.

The certificate information is available through the QR code below or CNCA's website: www.cnca.gov.cn



SIGNATURE:

谢肇煦



中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE

CHINA QUALITY CERTIFICATION CENTRE CO., LTD.
Section 9, No. 188, Nansihuan Xilu, Beijing 100070 P. R. China

Tel: +86 10 83886666
<http://www.cqc.com.cn>



CERTIFICATE OF PRODUCT CERTIFICATION


CERTIFICATE NO. : CQC24001453029

page 1 of 1

paper:

This certificate and attachments shall be used at the same time, and the verification instructions can be found in the main certificate.

CA-IS3221AN, CA-IS3221BN, CA-IS3221BN-Q1, CA-IS3221CN-Q1, CA-IS3222BN-Q1, CA-IS3222CN-Q1, CA-IS3221CAN, CA-IS3221CBN, The packaging form is S01C16-NB(N), the difference between different s of products is only that the name is different, the number of isolation channels is different, and the isolation channel structure, packaging form, materials used, and process flow are exactly the same; Basic insulation, internal penetration distance (insulation thickness) : N/A, external creepage distance specification > 4.0mm, through 125°C thermal cycle test, Altitude up to 5000m.

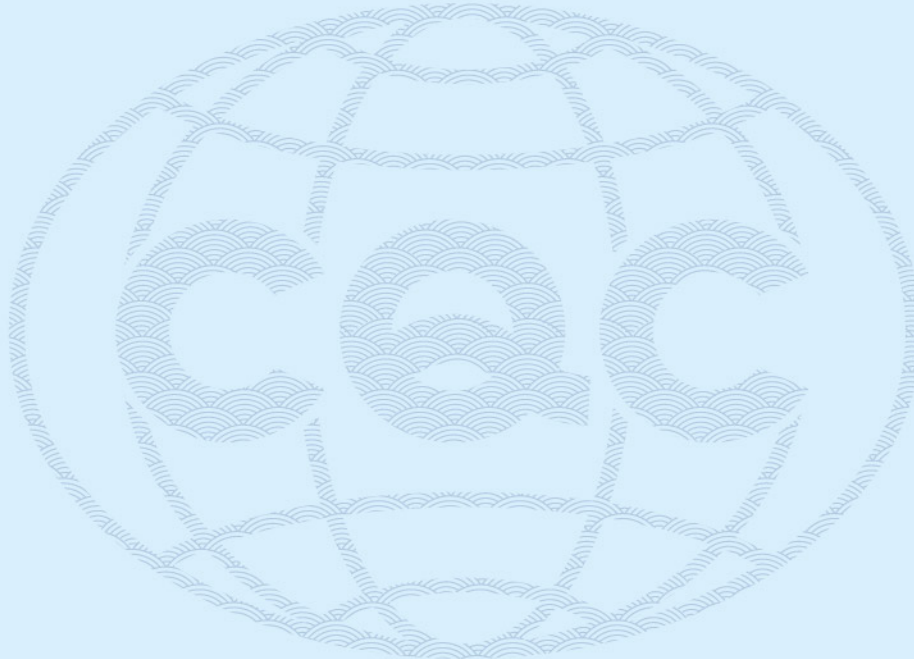

中国质量认证中心
CHINA QUALITY CERTIFICATION CENTRE